IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type:	Matrix Switcher
Manufacturer:	Atlona
Firmware Version:	N/A
Model(s):	AT-H2H-44M

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	3/04/2013	1.5.1	3.3.2	Initial version.

Driver Notes:

Control Commands & States:

All Outputs	1-4	
Executive Mode	On	Off
Output 1-4	1-4	
Power Control	On	Off
Preset Clear	0-9	
Preset Recall	0-9	
Preset Save	0-9	

Status Available:

Connection Status	Connected	Disconnected
Output 1-4	1-4	
Power Control	On	Off

MLC60 Series Supported Commands:

All Outputs	1-4	
Executive Mode	On	Off
Output 1-4	1-4	
Power Control	On	Off
Preset Clear	0-9	
Preset Recall	0-9	
Preset Save	0-9	

Cable and Adapter Requirements:

F /M RS-232 DB9 Straight cable.

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	115200	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

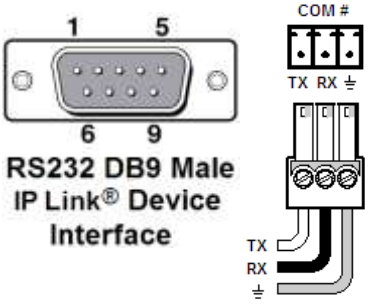

Signal	Pin	Main Cable	Pin	Signal
RxD	2	←	2	TxD
TxD	3	→	3	RxD
GND	5	—	5	GND

Note: Captive screw connector may also be used as a serial connection.

General Notes: